

SLA

FACTORY ACTIVATED

SLA | READY TO START

REF **BB9-B**



12v VOLTAGE - v

120A CCA - A (EN)

9.5Ah CAPACITY - Ah (20Hr)

9Ah CAPACITY - Ah (10Hr)

TECHNOLOGY


- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES


- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

DIMENSIONS

Length (A):	135mm ±2mm
Width (B):	75mm ±2mm
Container height:	139mm ±2mm
Total height (C):	139mm ±2mm

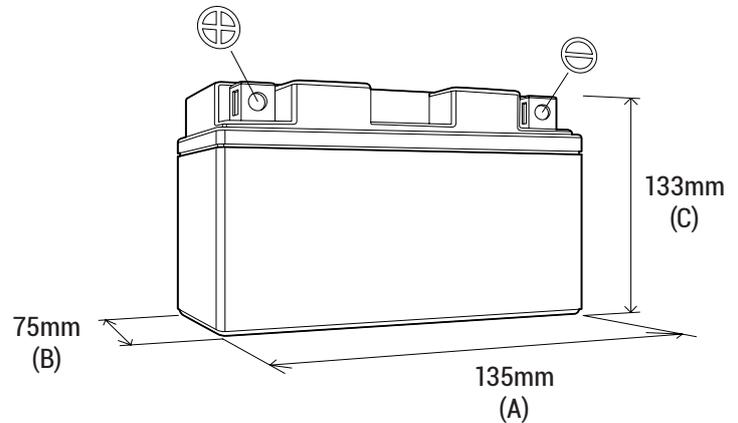

TERMINALS (mm)

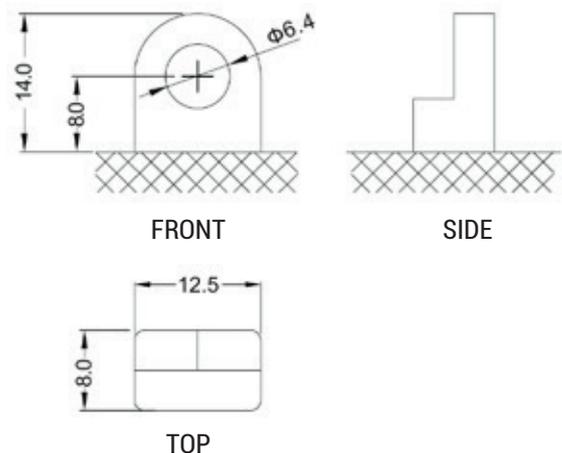

UPGRADE FOR

DRY BB9-B ; 12N9-4B-1

WEIGHT

Battery (with acid): Approx 3.10kg

MOUNTING ANGLE

