

SLA

FACTORY ACTIVATED

SLA | READY TO START

REF **BB5L-B**



12v VOLTAGE - v

65A CCA - A (EN)

5.3Ah CAPACITY - Ah (20Hr)

5Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance


UPGRADE FOR

DRY BB5L-B ; 12N5-3B

WEIGHT


Battery (with acid): Approx 2.00kg

MOUNTING ANGLE

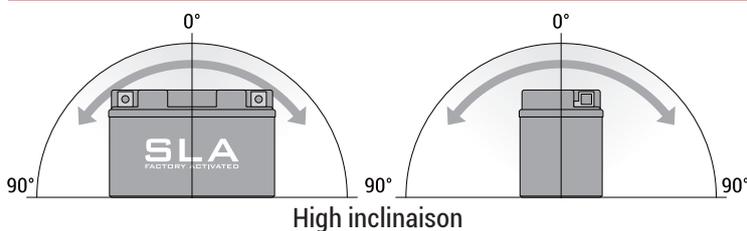


DIMENSIONS


Length (A):	120mm ±2mm
Width (B):	60mm ±2mm
Container height:	130mm ±2mm
Total height (C):	130mm ±2mm

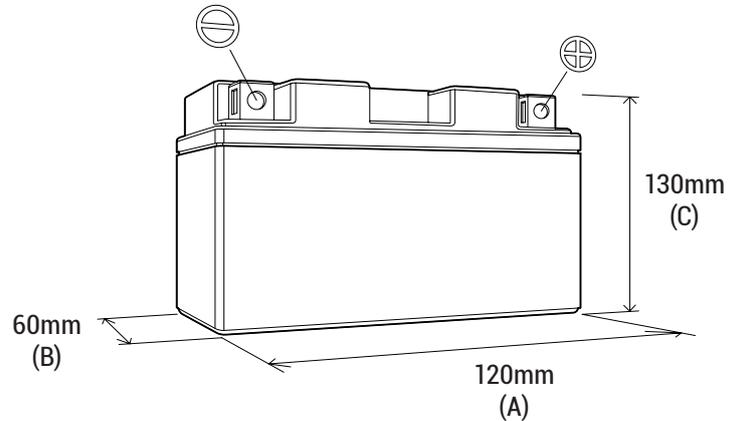


TERMINALS (mm)



FRONT



SIDE



TOP