

SLA

FACTORY ACTIVATED

SLA | READY TO START

REF **12N5.5-4A**



12v VOLTAGE - v

70A CCA - A (EN)

5.8Ah CAPACITY - Ah (20Hr)

5.5Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance


UPGRADE FOR

DRY 12N5.5-4A

WEIGHT


Battery (with acid): Approx 2.31kg

MOUNTING ANGLE

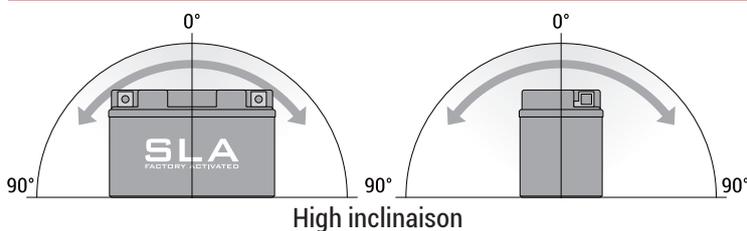

DIMENSIONS

| | |
|-------------------|------------|
| Length (A): | 135mm ±2mm |
| Width (B): | 60mm ±2mm |
| Container height: | 130mm ±2mm |
| Total height (C): | 130mm ±2mm |

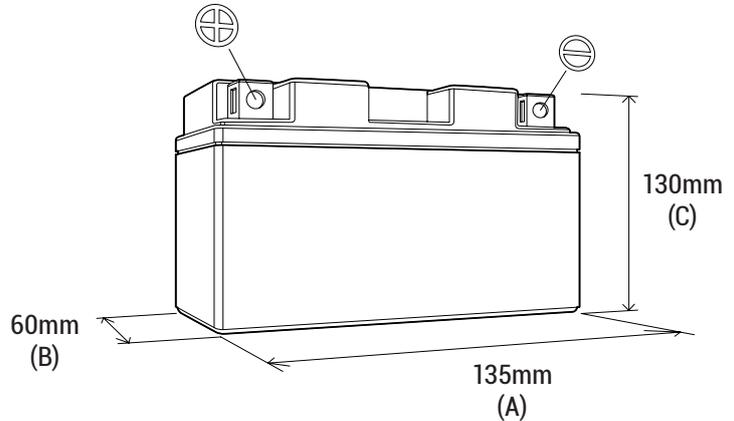

TERMINALS (mm)

